

# UTILITY PATENT APPLICATION TRANSMITTAL

## (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
12983Total Pages in this Submission  
3**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for invention entitled:

**LIQUID CRYSTAL DISPLAY DEVICE AND METHOD OF FABRICATING THE SAME**

and invented by:

Munehiro Ikeda

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 33 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
12983

Total Pages in this Submission  
3

**Application Elements (Continued)**

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☒ Formal                      Number of Sheets                      14
- b. ☐ Informal                      Number of Sheets                      \_\_\_\_\_
4. ☒ Oath or Declaration
- a. ☒ Newly executed *(original or copy)*                      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied  
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☒ Information Disclosure Statement/PTO-1449                      ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class                      ☒ Express Mail *(Specify Label No.):* EL452068715US

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
12983

Total Pages in this Submission  
3

**Accompanying Application Parts (Continued)**

15. ☒ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*
16. ☒ Additional Enclosures *(please identify below):*

Claim of Priority

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	28	- 20 =	8	x \$18.00	\$144.00
Indep. Claims	8	- 3 =	5	x \$78.00	\$390.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)		Recordation of Assignment			\$40.00
TOTAL FILING FEE					\$1,334.00

- ☒ A check in the amount of \$1,334.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-1013/SSMP as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Signature

Paul J. Esatto, Jr.  
Registration No: 30,749  
SCULLY, SCOTT, MURPHY & PRESSER  
400 Garden City Plaza  
Garden City, New York 11530  
(516) 742-4343

Dated: September 23, 1999

CC:

LIQUID CRYSTAL DISPLAY DEVICE  
AND  
METHOD OF FABRICATING THE SAME

5 BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The invention relates to a liquid crystal display device and a method of fabricating the same, and more particularly to a liquid crystal display device which is capable of eliminating variance in parasitic capacitance to be generated between a pixel electrode and signal lines, and a method of fabricating such a liquid crystal display device.

DESCRIPTION OF THE RELATED ART

A liquid crystal display device has recently drawn attention as a thin and low power-consumption display to be substituted for a conventional cathode ray tube. In particular, a so-called active matrix type liquid crystal display device, which employs a non-linear device such as a thin film transistor (TFT) and a metal insulator metal (MIM) type transistor as a driver element, has drawn attention due to high quality in display.

Hereinbelow is explained an operation of a conventional liquid crystal display device with reference to Fig. 1 which is a circuit diagram of a circuit equivalent to a pixel.

As illustrated in Fig. 1, a thin film transistor (TFT) 14 is comprised of a drain electrode 14a electrically connected to a first signal line 11i, a source electrode 14b, and a gate electrode 14c electrically connected to a scanning line 12. A pixel electrode 13 is electrically connected to the source electrode 14b. A liquid crystal capacitance 32 having a capacity of  $C_{LC}$  and including liquid crystal agent as dielectric material is formed between the pixel electrode 13 and an opposing electrode 33 formed on an opposing substrate.

A liquid crystal display device is generally designed to have a plurality of scanning lines 12 (only one of them is illustrated in Fig. 1) to which a scanning signal is successively applied. In a period other than a scanning period, a scanning signal is not applied to the scanning lines 12, and hence, the drain electrode 14a and the source electrode 14b are electrically insulated from each other. In a scanning period, a scanning signal is applied to the scanning lines 12. The scanning signal activates a channel of the thin film transistor 14, and thus, the drain electrode 14a and the source electrode 14b are electrically connected to each other. At the same time, a signal is applied to the first signal line 11i in accordance with a voltage to be applied to the liquid crystal capacitance 32, which is charged by the signal.

After a scanning period has been over, a scanning signal is no longer applied to the scanning lines 12, resulting in that the drain electrodes 14a and the source electrodes 14b become electrically insulated from each other again. Hence, the liquid crystal capacitance 32 is kept charged, and thus, it is possible to optically control liquid crystal by means of an electric field generated between the opposing electrode 33 and the pixel electrode 13.

In a period other than a scanning period, a quite small amount of current, which is so-called leakage current, flows between the drain electrode 14a and the source electrode 14b. The leakage current reduces a difference in voltage between the pixel electrode 13 and the opposing electrode 33 until a next scanning period. If such a difference in voltage is not reduced, there would caused degradation in contrast, resulting in reduction in display quality.

In order to avoid such degradation in contrast, an auxiliary capacitance 34 having a capacity of  $C_s$  is additionally inserted in parallel with the liquid crystal capacitance 32 to thereby prevent reduction in voltage. In the liquid crystal display device illustrated in Fig. 1, the auxiliary capacitance 34 is provided in parallel with the pixel electrode 13 and the thin film transistor 14.

The auxiliary capacitance 34 may be provided at other locations, unless

the auxiliary capacitance 34 is in parallel with the liquid crystal capacitance 32.

The liquid crystal display device is designed to include a plurality of such pixels as illustrated in Fig. 1, in an array.

Fig. 2 is a plan view of a pixel of the liquid crystal display device having the above-mentioned structure. In Fig. 2, the auxiliary capacitance 34 illustrated in Fig. 1 is not illustrated for the sake of simplicity.

As illustrated in Fig. 2, the pixel electrode 13 is sandwiched between the first and second signal lines 11i and 11j. In other words, the first signal line 11i extends along one side of the pixel electrode 13, and the second signal line 11j extends along the other side of the pixel electrode 13. Hence, there are generated a first parasitic capacitance 16i having a capacity of Cd-pii between the pixel electrode 13 and the first signal line 11i, and a second parasitic capacitance 16j having a capacity of Cd-pij between the pixel electrode 13 and the second signal line 11j.

The longer the length Li and Lj along which the pixel electrode 13 is adjacent to the first and second signal lines 11i and 11j are, or the shorter the spaces di and dj between the pixel electrode 13 and the first and second signal lines 11i and 11j are, the greater the parasitic capacitances 16i and 16j are. The parasitic capacitances 16i and 16j cause a voltage of the pixel electrode 13 to be influenced by fluctuation in voltage of the first and second signal lines 11i and 11j.

The fluctuation  $\Delta V_{pi}$  in voltage of the pixel electrode 13 is represented as follows.

$$\Delta V_{pi} = (C_{d-pii} \times \Delta V_i + C_{d-pij} \times \Delta V_j) / (C_{LC} + C_s + C_{d-pii} + C_{d-pij})$$

In the equation,  $\Delta V_i$  and  $\Delta V_j$  represent fluctuation in voltage of the first and second signal lines 11i and 11j, respectively.

Hereinbelow is explained a method of driving the liquid crystal display device illustrated in Figs. 1 and 2.

It is desirable that an orientation of an electric field to be applied to the liquid crystal capacitance 32, that is, a polarity of the pixel electrode 13 is

inverted every period for updating display. This is because if a polarity of the pixel electrode 13 is kept unchanged, there would occur phenomenon called "burning" in which display is fixed when the same image is kept displayed, and display cannot be returned back to original display. This degrades quality in display.

In addition, it is desired that polarity of the pixel electrodes is uniformly distributed in a screen of a liquid crystal display device. The reason is as follows. In an actual liquid crystal display device, there exists a slight difference in brightness in display in accordance with positive or negative polarity of the pixel electrode 13. If the polarity of the pixel electrode 13 in an entire screen alters between positive and negative ones each time display is updated, brightness and darkness are repeated, which remarkably deteriorates visibility.

For this reason, there have been suggested a lot of arrangements of polarity of pixel electrodes in a screen and a lot of methods of driving a liquid crystal display device.

Fig. 3A illustrates polarity of pixel electrodes in a screen in a certain display updating period, and Fig. 3B illustrates polarity of pixel electrodes in a screen in a next display updating period both in gate line inversion drive. Namely, Figs. 3A and 3B show how polarity of pixel electrodes vary in successive display updating periods in gate line inversion drive. Similarly, Fig. 4A illustrates polarity of pixel electrodes in a screen in a certain display updating period, and Fig. 4B illustrates polarity of pixel electrodes in a screen in a next display updating period both in drain line inversion drive. Namely, Figs. 4A and 4B show how polarity of pixel electrodes vary in successive display updating periods in drain line inversion drive. Fig. 5A illustrates polarity of pixel electrodes in a screen in a certain display updating period, and Fig. 5B illustrates polarity of pixel electrodes in a screen in a next display updating period both in dot inversion drive. Namely, Figs. 5A and 5B show how polarity of pixel electrodes vary in successive display updating periods in dot inversion drive.

Herein, the gate line inversion drive means a method of driving a liquid crystal display device, in which pixel electrodes arranged in a direction in which scanning lines extend are designed to have the same polarity, and those polarity are inverted each time display is to be updated. The drain line inversion drive means a method of driving a liquid crystal display device, in which pixel electrodes arranged in a direction in which signal lines extend are arranged are designed to have the same polarity, and those polarity are inverted each time display is to be updated. The dot inversion drive means a method of driving a liquid crystal display device, in which adjacent pixel electrodes are designed to have opposite polarity both in a direction in which scanning lines extend and both in a direction in which signal lines extend, and those polarity are inverted each time display is to be updated.

In Figs. 3A, 3B, 4A, 4B, 5A and 5B, pixel electrodes having a sign "+" are designed to have a positive polarity, whereas pixel electrodes having a sign "-" are designed to have a negative polarity.

When a liquid crystal display is driven in such a manner as illustrated in Figs. 3A to 5B, fluctuation in voltage of the signal lines is maximized when polarity of the signal lines are inverted. Accordingly, voltage of a pixel electrode is influenced most remarkably at that time, and hence, brightness is varied.

As is obvious in view of Figs. 3A, 3B, 4A, 4B, 5A and 5B, adjacent signal lines always have the same polarity in the gate line inversion drive illustrated in Figs. 3A and 3B. In contrast, adjacent signal lines always have opposite polarity in both the drain line inversion drive illustrated in Figs. 4A and 4B and the dot inversion drive illustrated in Figs. 5A and 5B. Hence, influence caused by polarity inversion is cancelled each other in the drain line inversion drive and the dot inversion drive, and hence, it is possible to reduce fluctuation in brightness of a pixel relative to the gate line inversion drive illustrated in Figs. 3A and 3B.

However, such reduction in fluctuation in brightness of a pixel is eliminated, if the parasitic capacitances  $C_{d-pii}$  and  $C_{d-pij}$  generated between the



pixel electrode and the signal lines are quite different from each other. Hence, the parasitic capacitances between the pixel electrode and the signal lines have to be designed to have the same capacity in order to minimize fluctuation in brightness of a pixel, caused by fluctuation in voltage of the signal lines.

As mentioned earlier, the thin film transistor 14 is turned on receipt of a scanning signal transmitted through the scanning line 12 in the conventional liquid crystal display device illustrated in Fig. 2. That is, the drain electrode 14a is electrically communicated to the source electrode 14b. At that time, a liquid crystal capacitance and an auxiliary capacitance (not illustrated) both formed between the pixel electrode 13 and the opposing electrode (not illustrated) are charged by a display signal having been applied to the first signal line 11i, electric charges thus charged in the liquid crystal capacitance and the auxiliary capacitance are kept as they are even after the thin film transistor 14 is turned off. Hence, images can be displayed in a screen.

As illustrated in Fig. 2, the thin film transistor 14 is generally formed in the vicinity of an intersection of the first signal line 11i with the scanning line 12. In such arrangement, the pixel electrode 13 is formed with a cut-out portion in order to avoid interference of the pixel electrode 13 with the thin film transistor 14. The cut-out portion has a length  $L_t$  in a direction in which the first signal line 11i extends.

As a result, a length  $L_i$  along which the pixel electrode 13 is adjacent to the first signal line 11i is not equal to a length  $L_j$  along which the pixel electrode 13 is adjacent to the second signal line 11j. Accordingly, if a space  $d_i$  between the pixel electrode 13 and the first signal line 11i is equal to a space  $d_j$  between the pixel electrode 13 and the second signal line 11j, the parasitic capacitance  $C_{d-pij}$  generated between the pixel electrode 13 and the second signal line 11j is greater than the parasitic capacitance  $C_{d-pii}$  generated between the pixel electrode 13 and the first signal line 11i ( $C_{d-pii} < C_{d-pij}$ ), which is not preferable because voltage of the pixel electrode 13 is influenced by fluctuation in voltage in the

signal lines.

In order to solve this problem, Japanese Unexamined Patent Publication No. 5-80353 has suggested various solutions as follows.

First, Japanese Unexamined Patent Publication No. 5-80353 has suggested a method of equalizing parasitic capacitances to each other by setting a space  $d_j$  between the pixel electrode 13 and the second signal line 11j to be greater than a space between the pixel electrode 13 and the first signal line 11i ( $d_i < d_j$ ), to thereby ensure that a parasitic capacitance per a unit length between the pixel electrode 13 and the first signal line 11i is greater than the same between the pixel electrode 13 and the second signal line 11j.

However, since the pixel electrode 13 is separately exposed to light from the first and second signal lines 11i and 11j in this method, the spaces  $d_i$  and  $d_j$  are not always formed equal to designed values due to misalignment of masks in exposure. As a result, the parasitic capacitances are not coincident with each other.

In order to equalize the parasitic capacitances to each other, it would be necessary to design the spaces  $d_i$  and  $d_j$  so wide that influence caused by misalignment of masks can be ignored. However, this significantly reduces a numerical aperture (NA).

Secondly, Japanese Unexamined Patent Publication No. 5-80353 has suggested a method of equalizing the parasitic capacitances to each other, in which a space  $d_j$  between the pixel electrode 13 and the second signal line 11j is divided into two regions in one of which the space  $d_j$  is designed to be equal to a space  $d_i$  between the pixel electrode 13 and the first signal line 11i, and in the other of which the space  $d_j$  is greater than the space  $d_i$ .

However, this second method cannot sufficiently equalize the parasitic capacitances to each other for the same reason as the above-mentioned first method.

Thirdly, Japanese Unexamined Patent Publication No. 5-80353 has

suggested a liquid crystal display device in which the first signal line 11i is designed to have a projection to ensure that a length along which the pixel electrode 13 is adjacent to the first signal line 11i is equal to a length along which the pixel electrode 13 is adjacent to the second signal line 11j.

5           However, the suggested liquid crystal display device is accompanied with a problem that the parasitic capacitances are not equal to each other due to misalignment of masks.

          Fourthly, Japanese Unexamined Patent Publication No. 5-80353 has suggested a liquid crystal display device designed to include a parasitic capacity  
10       compensator. In the suggested liquid crystal display device, a signal line branches away. The parasitic capacity compensator is comprised of a branching portion and the signal line which partially interpose a pixel electrode therebetween.

          In accordance with the liquid crystal display device, the above-  
15       mentioned problem of misalignment of masks can be solved. However, it is necessary in the liquid crystal display device to design a space between the pixel electrode and the branching portion of the signal line in the parasitic capacity compensator smaller than a space between the pixel electrode and the signal line.

          In addition, when the signal lines and the pixel electrode are formed in  
20       a common layer, they have to be spaced away from each other to some degree in order to avoid short-circuit therebetween. Thus, there is a critical space between the signal lines and the pixel electrode. Hence, if such a critical space is applied to the above-mentioned parasitic capacity compensator, it would be necessary to space the pixel electrode from the signal lines by a distance greater than the  
25       critical space. However, this results in reduction in an area of the pixel electrode, which unpreferably causes reduction in a numerical aperture.

          Fifthly, Japanese Unexamined Patent Publication No. 5-80353 has suggested a liquid crystal display device in which the parasitic capacity compensator is overlapped the pixel electrode with an insulating film being

sandwiched therebetween, and the parasitic capacitances are compensated for by electrostatic capacitance of an overlapping portion of the parasitic capacity compensator.

5 In accordance with the liquid crystal display device, the problem having been mentioned in the fourth suggestion can be solved. However, the fifth suggestion cannot be applied to a liquid crystal display device in which the pixel electrode and the signal lines are formed in a common layer.

Japanese Unexamined Patent Publication No. 6-274130 has suggested a liquid crystal display device comprised of (a) a first substrate including a switching device, a light-permeable pixel electrode electrically connected to a terminal of the switching device, a first signal line, a second signal line extending adjacently to the first signal line, and a third signal line through which a signal for turning the switching device on or off is transmitted, (b) a second substrate on which an opposing electrode is formed, (c) a drive circuit which applies a signal to the second signal line which signal has a polarity opposite to a polarity of a signal to be applied to the first signal line, and (d) a liquid crystal layer sandwiched between the first and second substrates, the pixel electrode overlapping the first and second signal lines with an insulating thin film being sandwiched therebetween.

20 However, the suggested liquid crystal display device is accompanied with the above-mentioned problem that a parasitic capacitance generated between the pixel electrode and the first signal line is not equal to a parasitic capacitance between the pixel electrode and the second signal line due to a difference in length between a length along which the pixel electrode is adjacent to the first signal line and a length along which the pixel electrode is adjacent to the second signal line.

## SUMMARY OF THE INVENTION

In view of the above-mentioned problems in the conventional liquid

crystal display devices, it is an object of the present invention to provide a liquid crystal display device which is capable of minimizing imbalance in parasitic capacitances to be generated between a pixel electrode and first and second signal lines, and hence, ensuring no fluctuation in brightness.

5 It is also an object of the present invention to provide a method of fabricating such a liquid crystal display device.

In one aspect of the present invention, there is provided a liquid crystal display device including (a) a pixel electrode, (b) a first signal line extending along one side of the pixel electrode, and (c) a second signal line extending along the  
10 other side of the pixel electrode, a first length along which the pixel electrode and the first signal line are adjacent to each other being equal to a second length along which the pixel electrode and the second signal line are adjacent to each other, a first space between the pixel electrode and the first signal line being equal to a second space between the pixel electrode and the second signal line.

15 It is preferable that the pixel electrode includes a region having been exposed to light, at a periphery thereof.

It is preferable that the pixel electrode is formed in a layer in which the first and second signal lines are also formed.

It is preferable that the first and second signal lines are formed in a  
20 first layer, and the pixel electrode is formed in a second layer which is electrically isolated from the first layer by an insulating layer sandwiched between the first and second layers.

There is further provided a liquid crystal display device including (a) a pixel electrode, (b) a first signal line extending along one side of the pixel electrode,  
25 and (c) a second signal line extending along the other side of the pixel electrode, at least one of the first and second signal lines having a projecting portion extending towards the pixel electrode, a first length along which the pixel electrode and the first signal line are adjacent to each other being equal to a second length along which the pixel electrode and the second signal line are adjacent to each other, a

first space between the pixel electrode and the first signal line being equal to a second space between the pixel electrode and the second signal line.

There is still further provided a liquid crystal display device including (a) a pixel electrode, (b) a thin film transistor located adjacent to the pixel electrode and at one side of the pixel electrode, (c) a first signal line extending along the one side of the pixel electrode, and (d) a second signal line extending along the other side of the pixel electrode, the pixel electrode being formed with a cut-out portion at the other side thereof, the cut-out portion having a length equal to a length along which the first signal line cannot be adjacent to the pixel electrode by the thin film transistor, a first length along which the pixel electrode and the first signal line are adjacent to each other being equal to a second length along which the pixel electrode and the second signal line are adjacent to each other, a first space between the pixel electrode and the first signal line being equal to a second space between the pixel electrode and the second signal line.

There is yet further provided a liquid crystal display device including (a) a plurality of pixel electrodes each spaced away from adjacent ones by a predetermined distance, (b) first signal lines each extending along one side of each of the pixel electrodes, each of the first signal lines having a bending portion which extends along a periphery of each of the pixel electrodes, and (c) second signal lines each extending along the other side of each of the pixel electrodes, each of the second signal lines having a bending portion which extends along a periphery of each of the pixel electrodes, at least one of the first and second signal lines having a projecting portion extending towards the pixel electrode, a first length along which the pixel electrode and the first signal line are adjacent to each other being equal to a second length along which the pixel electrode and the second signal line are adjacent to each other, a first space between the pixel electrode and the first signal line being equal to a second space between the pixel electrode and the second signal line.

In another aspect of the present invention, there is provided a method

of fabricating a liquid crystal display device including a pixel electrode, a first signal line extending along one side of the pixel electrode, and a second signal line extending along the other side of the pixel line, including the steps of (a) forming a scanning line on a transparent substrate, and then, forming a gate insulating film  
5 on the scanning line and the transparent substrate, (b) forming a channel on the gate insulating film above the scanning line, (c) forming the first and second signal lines so that a first length along which the pixel electrode and the first signal line are adjacent to each other is equal to a second length along which the pixel electrode and the second signal line are adjacent to each other, and a first  
10 space between the pixel electrode and the first signal line is equal to a second space between the pixel electrode and the second signal line, (d) forming the pixel electrode, and (e) covering a product resulting from the step (d) with an insulating film.

It is preferable that the pixel electrode is formed between the first and  
15 second signal lines in a common layer in the step (d).

It is preferable that the pixel electrode is formed, after the insulating film has been formed, on the insulating film above a region sandwiched between the first and second signal lines.

There is further provided a method of fabricating a liquid crystal  
20 display device including a pixel electrode, a first signal line extending along one side of the pixel electrode, and a second signal line extending along the other side of the pixel line, including the steps of (a) forming a scanning line on a transparent substrate, and then, forming a gate insulating film on the scanning line and the transparent substrate, (b) forming a channel on the gate insulating  
25 film above the scanning line, (c) forming the first and second signal lines so that at least one of the first and second signal lines has a projecting portion extending towards the pixel electrode and that a first length along which the pixel electrode and the first signal line are adjacent to each other is equal to a second length along which the pixel electrode and the second signal line are adjacent to each

other, and a first space between the pixel electrode and the first signal line is equal to a second space between the pixel electrode and the second signal line, (d) forming the pixel electrode, and (e) covering a product resulting from the step (d) with an insulating film.

5           There is still further provided a method of fabricating a liquid crystal display device including a pixel electrode, a first signal line extending along one side of the pixel electrode, and a second signal line extending along the other side of the pixel line, including the steps of (a) forming a scanning line on a transparent substrate, and then, forming a gate insulating film on the scanning  
10 line and the transparent substrate, (b) forming a channel on the gate insulating film above the scanning line, (c) forming the first and second signal lines so that at least one of the first and second signal lines has a cut-out portion having a length equal to a length along which the first and/or second signal line(s) cannot be adjacent to the pixel electrode by a thin film transistor formed at one side of the  
15 pixel electrode, the cut-put portion being formed at the other side of the pixel electrode, a first length along which the pixel electrode and the first signal line are adjacent to each other being equal to a second length along which the pixel electrode and the second signal line are adjacent to each other, a first space between the pixel electrode and the first signal line being equal to a second space  
20 between the pixel electrode and the second signal line, (d) forming the pixel electrode, and (e) covering a product resulting from the step (d) with an insulating film.

          There is yet further provided a method of fabricating a liquid crystal display device including a plurality of pixel electrodes each spaced away from  
25 adjacent ones by a predetermined distance, first signal lines each extending along one side of each of the pixel electrodes, each of the first signal lines having a bending portion which extends along a periphery of each of the pixel electrodes, and second signal lines each extending along the other side of each of the pixel electrodes, each of the second signal lines having a bending portion which extends



along a periphery of each of the pixel electrodes, including the steps of (a) forming a scanning line on a transparent substrate, and then, forming a gate insulating film on the scanning line and the transparent substrate, (b) forming a channel on the gate insulating film above the scanning line, (c) forming the first and second  
5 signal lines so that at least one of each of the first signal lines and each of second signal lines has a projecting portion extending towards each of the pixel electrodes and that a first length along which each of the pixel electrodes and each of the first signal lines are adjacent to each other is equal to a second length along which each of the pixel electrodes and each of the second signal lines are adjacent to each  
10 other, and a first space between each of the pixel electrodes and each of the first signal lines is equal to a second space between each of the pixel electrodes and each of the second signal lines, (d) forming the pixel electrodes, and (e) covering a product resulting from the step (d) with an insulating film.

The advantages obtained by the aforementioned present invention will  
15 be described hereinbelow.

In accordance with the present invention, it is possible to equalize parasitic capacitances generated between a pixel electrode and signal lines to each other.

As mentioned earlier, spaces between a pixel electrode and signal lines  
20 may be different from each other due to misalignment of masks which might occur when a pixel electrode is exposed to light separately from signal lines. In accordance with the present invention, the parasitic capacitances can be equalized to each other without being influenced by misalignment of masks.

Accordingly, the present invention makes it possible to prevent  
25 fluctuation in brightness of a pixel which fluctuation is caused by imbalance in parasitic capacitances between a pixel electrode and signal lines.

The above and other objects and advantageous features of the present invention will be made apparent from the following description made with reference to the accompanying drawings, in which like reference characters

designate the same or similar parts throughout the drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a circuit diagram of a circuit equivalent to a pixel in an active  
5 matrix type liquid crystal display device.

Fig. 2 is a plan view of a pixel in a conventional liquid crystal display device.

Fig. 3A illustrates polarity of pixel electrodes in a screen in a certain display-updating period in gate line inversion drive.

10 Fig. 3B illustrates polarity of pixel electrodes in a screen in a next display-updating period both in gate line inversion drive.

Fig. 4A illustrates polarity of pixel electrodes in a screen in a certain display-updating period in drain line inversion drive.

15 Fig. 4B illustrates polarity of pixel electrodes in a screen in a next display-updating period both in drain line inversion drive.

Fig. 5A illustrates polarity of pixel electrodes in a screen in a certain display-updating period.

Fig. 5B illustrates polarity of pixel electrodes in a screen in a next display-updating period both in dot inversion drive.

20 Fig. 6 is a plan view of a TFT substrate in a liquid crystal display device in accordance with the first embodiment of the present invention.

Fig. 7 is a cross-sectional view taken along the line VII-VII in Fig. 6.

Fig. 8 is a cross-sectional view taken along the line VIII-VIII in Fig. 6.

25 Fig. 9 is a plan view of a TFT substrate in a liquid crystal display device in accordance with the second embodiment of the present invention.

Fig. 10 is a cross-sectional view taken along the line X-X in Fig. 9.

Fig. 11 is a plan view of a TFT substrate in a liquid crystal display device in accordance with the third embodiment of the present invention.

Fig. 12 is a plan view of a TFT substrate in a liquid crystal display

device in accordance with the fourth embodiment of the present invention.

Fig. 13 is a flow chart of a method of fabricating the liquid crystal display device in accordance with the first, third or fourth embodiment.

Fig. 14 is a partial flow chart of a method of fabricating the liquid crystal display device in accordance with the second embodiment.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figs. 6, 7 and 8 illustrate a liquid crystal display device in accordance with the first embodiment. Fig. 6 is a plan view of a TFT substrate in the liquid crystal display device, Fig. 7 is a cross-sectional view taken along the line VII-VII in Fig. 6, and Fig. 8 is a cross-sectional view taken along the line VIII-VIII in Fig. 6.

As illustrated in Fig. 6, the liquid crystal display device is comprised of a pixel electrode 13, a first signal line 11i extending along one side of the pixel electrode 13, a second signal line 11j extending along the other side of the pixel electrode 13, and a thin film transistor (TFT) 14 located at a corner of the pixel electrode 13 and between the pixel electrode 13 and the first signal line 11i.

The pixel electrode 13 includes a pixel edge section 13a which defines an outer edge of the pixel electrode 13, and is located adjacent to the first and second signal lines 11i and 11j through the pixel edge section 13a. The pixel edge section 13a is formed by being exposed to light simultaneously with the first and second signal lines 11i and 11j.

A scanning line 12 extends perpendicularly to the first and second signal lines 11i and 11j. A gate electrode (not illustrated) of the thin film transistor 14 is electrically connected to the scanning line 12.

The first signal line 11i is formed with a projecting portion 11a projecting towards the pixel electrode 13. The projecting portion 11a is designed to have such a length that a first length along which the pixel electrode 13 is adjacent to the first signal line 11i is equal to a second length along which the

pixel electrode 13 is adjacent to the second signal line 11j. That is, assuming that a length along which the pixel electrode 13 is vertically adjacent to the first signal line 11i is represented with "La", a length along which the pixel electrode 13 is horizontally adjacent to the projecting portion 11a is represented with "Lb", a  
5 length along which the pixel electrode 13 is vertically adjacent to the projecting portion 11a is represented with "Lc", and a length along which the pixel electrode 13 is adjacent to the second signal line 11j is represented with "L", the projecting portion 11a is designed to meet the following equation.

$$La + Lb + Lc = L \quad (A)$$

10 A space "d" between the pixel electrode 13 and the first signal line 11i including the projecting portion 11a is equal anywhere to a space "d" between the pixel electrode 13 and the second signal line 11j.

In accordance with the first embodiment, a parasitic capacitance generated between the pixel electrode 13 and the first signal line 11i is equal to a  
15 parasitic capacitance generated between the pixel electrode 13 and the second signal line 11j. This is not influenced by variance produced in fabrication steps.

Hence, the first embodiment makes it possible to prevent fluctuation in brightness of a pixel which fluctuation is caused by imbalance in a parasitic capacitance between the pixel electrode and the signal lines, ensuring high  
20 quality in display.

Though the first signal line 11i is designed to have the projecting portion 11a in the first embodiment, it should be noted that the second signal line 11j may be designed to have the projecting portion 11a. As an alternative, the projecting portion 11a may be formed both in the first and second signal lines 11i  
25 and 11j.

Hereinbelow is explained a method of fabricating the liquid crystal display device illustrated in Fig. 6 with reference to Figs. 7, 8 and 13.

First, as illustrated in Fig. 7, a pattern of a scanning line 12 composed of electrically conductive material such as metal is formed on a glass substrate 31

in step 100.

Then, a gate insulating film 32 composed of electrically insulating material such as silicon nitride is formed all over the glass substrate 31 and the scanning line pattern 12 in step 110.

Then, an amorphous silicon layer 33 which will make a channel of a transistor is formed on the gate insulating film 32 above the scanning line pattern 12 in step 120. Then, a contact layer 35 is formed on the amorphous silicon layer 33 in step 130 in order to establish electrical connection between the channel and later formed drain electrode 14a and source electrode 14b.

Then, the first signal line 11i is formed on the gate insulating film 32 as illustrated in Fig. 7, and the second signal line 11j is formed on the gate insulating film 32 as illustrated in Fig. 8. Both the first and second signal lines 11i and 11j are composed of electrically conductive material such as metal. The first and/or second signal line(s) 11i and 11j are(is) formed to have a projecting portion 11a in step 140 so that the above-mentioned equation (A) is established, that is, a first length along which the pixel electrode 13 is adjacent to the first signal line 11i is equal to a second length along which the pixel electrode 13 is adjacent to the second signal line 11j.

Simultaneously with the first and second signal lines 11i and 11j are formed the pixel edge section 13a through which the pixel electrode 13 is adjacent to the first and second signal lines 11i and 11j, a drain electrode 14a, and a source electrode 14b in step 140.

The pixel edge section 13a is formed in such a manner that a space "d" between the pixel edge section 13a and the first and second signal lines 11i and 11j is constant anywhere.

At this stage, the pixel edge section 13a may be electrically connected to the source electrode 14b, or may not.

Then, there is formed the pixel electrode 13 within the pixel edge section 13a so that the pixel electrode 13 makes contact with the pixel edge

section 13a, in step 150. The pixel electrode 13 is composed of electrically conductive transparent material such as indium-tin-oxide (ITO). The pixel electrode 13 is formed so as to electrically connect with the pixel edge section 13a and the source electrode 14b, and so as to be located remoter from the first and  
5 second signal lines 11i and 11j than the pixel edge section 13a.

Since the contact layer 35 bridges over the drain electrode 14a and the source electrode 14b, the drain electrode 14a is kept in electrical connection with the source electrode 14b, if the contact layer 35 is kept as it is. Hence, a portion 35a of the contact layer 35 is removed between the drain electrode 14a and the  
10 source electrode 14b in step 160.

Then, as illustrated in Figs. 7 and 8, an insulating protection film 36 composed of insulating material such as silicon nitride is deposited all over the liquid crystal display device in step 170. The insulating protection film 36 is not illustrated in Fig. 6 for simplification.

Then, unnecessary portions of the insulating protection film 36 are removed in step 180. Thus, a TFT substrate of the liquid crystal display device in accordance with the first embodiment is completed.

In accordance with the first embodiment, it is possible to equalize the parasitic capacitance generated between the pixel electrode 13 and the first signal  
20 line 11i to the parasitic capacitance generated between the pixel electrode 13 and the second signal line 11j.

In the conventional liquid crystal display device illustrated in Fig. 2, the space  $d_i$  between the pixel electrode 13 and the first signal line 11i may be different from the space  $d_j$  between the pixel electrode 13 and the second signal  
25 line 11j due to misalignment of masks which might occur when the pixel electrode 13 is exposed to light separately from the first and second signal lines 11i and 11j. However, in accordance with the first embodiment, the parasitic capacitances can be equalized to each other without being influenced by misalignment of masks.

Accordingly, the first embodiment makes it possible to prevent

fluctuation in brightness of a pixel which fluctuation is caused by imbalance in parasitic capacitances between the pixel electrode 13 and the signal lines 11i and 11j, ensuring high quality in display.

Though the present invention is applied in the first embodiment to a channel etch type amorphous silicon TFT having a bottom gate structure, it should be noted that the present invention is not to be limited to the structure having been mentioned in the first embodiment. For instance, the present invention may be applied to a channel protection type amorphous silicon TFT or a polysilicon TFT.

As an alternative, the present invention may be applied to a liquid crystal display device including a non-linear element such as MIM as a driver element.

Fig. 9 is a plan view of a TFT substrate in the liquid crystal display device in accordance with the second embodiment. Fig. 10 is a cross-sectional view taken along the line X-X in Fig. 9.

As illustrated in Fig. 9, the liquid crystal display device is comprised of a pixel electrode 13, a first signal line 11i extending along one side of the pixel electrode 13, a second signal line 11j extending along the other side of the pixel electrode 13, and a thin film transistor (TFT) 14 located at a corner of the pixel electrode 13 and between the pixel electrode 13 and the first signal line 11i.

The liquid crystal display device in accordance with the second embodiment has basically the same structure as that of the liquid crystal display device in accordance with the first embodiment. However, the second embodiment is different from the first embodiment with respect to fabrication steps. In the liquid crystal display device in accordance with the second embodiment, the pixel electrode 13 is formed after the formation of the insulating protection film 36 and the removal of unnecessary portions thereof. That is, the pixel electrode 13 and the first and second signal lines 11i and 11j are formed in a common layer in the first embodiment, as illustrated in Figs. 7 and 8, whereas the

pixel electrode 13 is formed in a layer separate from a layer in which the first and second signal lines 11i and 11j are formed, in the second embodiment, as illustrated in Fig. 10.

In Fig. 10, a thickness of the insulating protection film 36 is illustrated in exaggeration. In general, the insulating protection film 36 has a thickness of about 50 nm. A minimum space by which the pixel edge section 13a are spaced away from the first and second signal lines 11i and 11j without short-circuiting each other is generally in the range of  $3\mu\text{m}$  to  $4\mu\text{m}$  (3,000 nm to 4,000 nm). Hence, even if the pixel electrode 13 is formed in a layer separate from a layer in which the first and second signal lines 11i and 11j are formed, with the insulating protection film 36 being sandwiched between those layers, the second embodiment can provide the same advantages as those obtained by the first embodiment.

Though not illustrated, the pixel electrode 13 is designed to make electrical contact with the pixel edge section 13 at a certain point.

Fig. 14 is a flow chart of a method of fabricating the liquid crystal display device in accordance with the second embodiment.

The method has the same steps 100 to 140 illustrated in Fig. 13. In this method, after the step 140 has been carried out, a portion 35a of the contact layer 35 between the drain electrode 14a and the source electrode 14b is removed in step 190.

Then, the insulating protection film 36 composed of electrically insulating material such as silicon nitride is deposited all over the liquid crystal display device in step 200. Thereafter, unnecessary portions of the insulating protection film 36 are removed in step 210.

Then, as illustrated in Fig. 10, there is formed the pixel electrode 13 within the pixel edge section 13a so that the pixel electrode 13 makes contact with the pixel edge section 13a, in step 220. The pixel electrode 13 is composed of electrically conductive transparent material such as indium-tin-oxide (ITO). The pixel electrode 13 is formed so as to electrically connect with the pixel edge section



13a and the source electrode 14b, and so as to be located remoter from the first and second signal lines 11i and 11j than the pixel edge section 13a.

Thus, there is completed a TFT substrate of the liquid crystal display device in accordance with the second embodiment.

5            Fig. 11 is a plan view of a TFT substrate in the liquid crystal display device in accordance with the third embodiment.

          The liquid crystal display device in accordance with the third embodiment is structurally different from the liquid crystal display device in accordance with the first embodiment in that the pixel electrode 13 and the pixel edge section 13a are formed with a cut-out portion 15 in place of the projecting portion 11a formed at the first signal line 11i.

          As illustrated in Fig. 11, the cut-out portion 15 is formed at a corner of the pixel electrode 13 at a side opposite to a side at which the thin film transistor 14 is formed.

15            The cut-out portion 15 is designed to have a length in a direction in which the signal lines 11i and 11j extend which length is equal to a length by which the first signal line 11i cannot be adjacent to the pixel electrode 13 due to presence of the thin film transistor 14. Accordingly, a first length L1 along which the pixel electrode 13 is adjacent to the first signal line 11i is equal to a second  
20    length L2 along which the pixel electrode 13 is adjacent to the second signal line 11j ( $L1 = L2$ ).

          The pixel electrode 13 and the signal lines 11i and 11j may be formed in a common layer similarly to the first embodiment, or may be formed in separate layers similarly to the second embodiment.

25            In a method of fabricating the liquid crystal display device in accordance with the third embodiment, the step 140a is carried out in place of the step 140 in the method of fabricating the liquid crystal display device in accordance with the first embodiment, illustrated in Fig. 13. The steps 100 to 130 and 150 to 180 are carried out similarly to the first embodiment.

In the step 140a, the first and second signal lines 11i and 11j are formed, and there is also formed the pixel edge section 13a having the cut-out portion 15 at a corner thereof at a side opposite to a side at which the thin film transistor 14 is formed. The cut-out portion 15 is designed to have such a length that a first length L1 along which the pixel electrode 13 is adjacent to the first signal line 11i is equal to a second length L2 along which the pixel electrode 13 is adjacent to the second signal line 11j ( $L1 = L2$ ).

In addition, the drain electrode 14a and the source electrode 14b are formed at the same time.

In the step 150, the pixel electrode 13 is formed so as to have the cut-out portion 15 in harmony with the cut-out portion 15 formed at the pixel edge section 13a.

The pixel electrode 13 and the signal lines 11i and 11j in the third embodiment may be formed in separate layers, in which case, the steps illustrated in Fig. 14 are carried out in the same order as that of the second embodiment.

Fig. 12 is a plan view of a TFT substrate in the liquid crystal display device in accordance with the fourth embodiment.

In the fourth embodiment, the pixel electrodes 13 are arranged in delta-arrangement in which a line of the pixel electrodes 13 sandwiched between adjacent scanning lines 12 are deviated by half-pitch from an adjacent line of the pixel electrodes 13.

In a liquid crystal display device arranged in delta-arrangement, as illustrated in Fig. 12, it is necessary to design the first and second signal lines 11i and 11j not to interfere with the pixel electrode 13. Accordingly, the first and second signal lines 11i and 11j have a bending portion in harmony with a shape of the pixel electrode 13. Hence, a length L1 along which the pixel electrode 13 is adjacent to the first signal line 11i is generally remarkably different from a length L2 along which the pixel electrode 13 is adjacent to the second signal line 11j, resulting in that a voltage of the pixel electrode 13 is significantly influenced by

voltages of the first and second signal lines 11i and 11j.

In order to solve such a problem, the second signal line 11j in the fourth embodiment is formed with a projecting portion 11a projecting towards the pixel electrode 13, to thereby ensure that a first length L1 along which the pixel electrode 13 is adjacent to the first signal line 11i is equal to a second length L2 along which the pixel electrode 13 is adjacent to the second signal line 11j ( $L1 = L2$ ).

In addition, the pixel edge section 13a is exposed to light concurrently with the first and second signal lines 11i and 11j, which ensures that a voltage of the pixel electrode 13 is less influenced by voltages of the first and second signal lines 11i and 11j.

The pixel electrode 13 and the signal lines 11i and 11j may be formed in a common layer similarly to the above-mentioned embodiments, in which case, the steps illustrated in Fig. 13 are carried out in the same order as having been explained earlier with reference to Fig. 13. As an alternative, the pixel electrode 13 and the signal lines 11i and 11j may be formed in separate layers, in which case, the steps illustrated in Fig. 14 are carried out in the same order as having been explained earlier with reference to Fig. 14.

While the present invention has been described in connection with certain preferred embodiments, it is to be understood that the subject matter encompassed by way of the present invention is not to be limited to those specific embodiments. On the contrary, it is intended for the subject matter of the invention to include all alternatives, modifications and equivalents as can be included within the spirit and scope of the following claims.

The entire disclosure of Japanese Patent Application No. 10-271140 filed on September 25, 1998 including specification, claims, drawings and summary is incorporated herein by reference in its entirety.

WHAT IS CLAIMED IS:

1. A liquid crystal display device comprising:

(a) a pixel electrode;

5 (b) a first signal line extending along one side of said pixel electrode; and

(c) a second signal line extending along the other side of said pixel electrode,  
a first length along which said pixel electrode and said first signal line are  
adjacent to each other being equal to a second length along which said pixel  
electrode and said second signal line are adjacent to each other,

10 a first space between said pixel electrode and said first signal line being  
equal to a second space between said pixel electrode and said second signal line.

2. The liquid crystal display device as set forth in claim 1, wherein said pixel  
electrode includes a region having been exposed to light, at a periphery thereof.

15 3. The liquid crystal display device as set forth in claim 1, wherein said pixel  
electrode is formed in a layer in which said first and second signal lines are also  
formed.

20 4. The liquid crystal display device as set forth in claim 1, wherein said first  
and second signal lines are formed in a first layer, and said pixel electrode is  
formed in a second layer which is electrically isolated from said first layer by an  
insulating layer sandwiched between said first and second layers.

25 5. A liquid crystal display device comprising:

(a) a pixel electrode;

(b) a first signal line extending along one side of said pixel electrode; and

(c) a second signal line extending along the other side of said pixel electrode,  
at least one of said first and second signal lines having a projecting portion

extending towards said pixel electrode,

a first length along which said pixel electrode and said first signal line are adjacent to each other being equal to a second length along which said pixel electrode and said second signal line are adjacent to each other,

- 5 a first space between said pixel electrode and said first signal line being equal to a second space between said pixel electrode and said second signal line.

6. The liquid crystal display device as set forth in claim 5, wherein said pixel electrode includes a region having been exposed to light, at a periphery thereof.

10

7. The liquid crystal display device as set forth in claim 5, wherein said pixel electrode is formed in a layer in which said first and second signal lines are also formed.

15

8. The liquid crystal display device as set forth in claim 5, wherein said first and second signal lines are formed in a first layer, and said pixel electrode is formed in a second layer which is electrically isolated from said first layer by an insulating layer sandwiched between said first and second layers.

20

9. A liquid crystal display device comprising:

(a) a pixel electrode;

(b) a thin film transistor located adjacent to said pixel electrode and at one side of said pixel electrode;

(c) a first signal line extending along said one side of said pixel electrode; and

25

(d) a second signal line extending along the other side of said pixel electrode,

said pixel electrode being formed with a cut-out portion at the other side thereof, said cut-out portion having a length equal to a length along which said first signal line cannot be adjacent to said pixel electrode by said thin film transistor,

a first length along which said pixel electrode and said first signal line are adjacent to each other being equal to a second length along which said pixel electrode and said second signal line are adjacent to each other,

a first space between said pixel electrode and said first signal line being  
5 equal to a second space between said pixel electrode and said second signal line.

10 10. The liquid crystal display device as set forth in claim 9, wherein said pixel electrode includes a region having been exposed to light, at a periphery thereof.

11. The liquid crystal display device as set forth in claim 9, wherein said pixel electrode is formed in a layer in which said first and second signal lines are also formed.

12. The liquid crystal display device as set forth in claim 9, wherein said first and second signal lines are formed in a first layer, and said pixel electrode is formed in a second layer which is electrically isolated from said first layer by an insulating layer sandwiched between said first and second layers.

20 13. A liquid crystal display device comprising:

(a) a plurality of pixel electrodes each spaced away from adjacent ones by a predetermined distance;

(b) first signal lines each extending along one side of each of said pixel electrodes, each of said first signal lines having a bending portion which extends  
25 along a periphery of each of said pixel electrodes; and

(c) second signal lines each extending along the other side of each of said pixel electrodes, each of said second signal lines having a bending portion which extends along a periphery of each of said pixel electrodes,

at least one of said first and second signal lines having a projecting portion

extending towards said pixel electrode,

a first length along which said pixel electrode and said first signal line are adjacent to each other being equal to a second length along which said pixel electrode and said second signal line are adjacent to each other,

5 a first space between said pixel electrode and said first signal line being equal to a second space between said pixel electrode and said second signal line.

10 14. The liquid crystal display device as set forth in claim 13, wherein each of said pixel electrodes include a region having been exposed to light, at a periphery thereof.

15 15. The liquid crystal display device as set forth in claim 13, wherein each of said pixel electrodes is formed in a layer in which said first and second signal lines are also formed.

20 16. The liquid crystal display device as set forth in claim 13, wherein said first and second signal lines are formed in a first layer, and said pixel electrodes are formed in a second layer which is electrically isolated from said first layer by an insulating layer sandwiched between said first and second layers.

25 17. A method of fabricating a liquid crystal display device including a pixel electrode, a first signal line extending along one side of said pixel electrode, and a second signal line extending along the other side of said pixel line, comprising the steps of:

(a) forming a scanning line on a transparent substrate, and then, forming a gate insulating film on said scanning line and said transparent substrate;

(b) forming a channel on said gate insulating film above said scanning line;

(c) forming said first and second signal lines so that a first length along which said pixel electrode and said first signal line are adjacent to each other is

equal to a second length along which said pixel electrode and said second signal line are adjacent to each other, and a first space between said pixel electrode and said first signal line is equal to a second space between said pixel electrode and said second signal line,

- 5       (d) forming said pixel electrode; and  
      (e) covering a product resulting from said step (d) with an insulating film.

18. The method as set forth in claim 17, wherein said pixel electrode is formed between said first and second signal lines in a common layer in said step  
10   (d).

19. The method as set forth in claim 18, wherein said pixel electrode is formed, after said insulating film has been formed, on said insulating film above a region sandwiched between said first and second signal lines.

15       20. A method of fabricating a liquid crystal display device including a pixel electrode, a first signal line extending along one side of said pixel electrode, and a second signal line extending along the other side of said pixel line, comprising the steps of:

- 20       (a) forming a scanning line on a transparent substrate, and then, forming a gate insulating film on said scanning line and said transparent substrate;  
      (b) forming a channel on said gate insulating film above said scanning line;  
      (c) forming said first and second signal lines so that at least one of said first and second signal lines has a projecting portion extending towards said pixel  
25   electrode and that a first length along which said pixel electrode and said first signal line are adjacent to each other is equal to a second length along which said pixel electrode and said second signal line are adjacent to each other, and a first space between said pixel electrode and said first signal line is equal to a second space between said pixel electrode and said second signal line,



- (d) forming said pixel electrode; and  
(e) covering a product resulting from said step (d) with an insulating film.

21. The method as set forth in claim 20, wherein said pixel electrode is  
5 formed between said first and second signal lines in a common layer in said step  
(d).

22. The method as set forth in claim 20, wherein said pixel electrode is  
formed, after said insulating film has been formed, on said insulating film above a  
10 region sandwiched between said first and second signal lines.

23. A method of fabricating a liquid crystal display device including a pixel  
electrode, a first signal line extending along one side of said pixel electrode, and a  
second signal line extending along the other side of said pixel line, comprising the  
15 steps of:

(a) forming a scanning line on a transparent substrate, and then, forming a  
gate insulating film on said scanning line and said transparent substrate;

(b) forming a channel on said gate insulating film above said scanning line;

(c) forming said first and second signal lines so that at least one of said first  
20 and second signal lines has a cut-out portion having a length equal to a length  
along which said first and/or second signal line(s) cannot be adjacent to said pixel  
electrode by a thin film transistor formed at one side of said pixel electrode,  
said cut-put portion being formed at the other side of said pixel electrode,  
a first length along which said pixel electrode and said first signal line are  
25 adjacent to each other being equal to a second length along which said pixel  
electrode and said second signal line are adjacent to each other,

a first space between said pixel electrode and said first signal line being  
equal to a second space between said pixel electrode and said second signal line,

(d) forming said pixel electrode; and

(e) covering a product resulting from said step (d) with an insulating film.

24. The method as set forth in claim 23, wherein said pixel electrode is formed between said first and second signal lines in a common layer in said step  
5 (d).

25. The method as set forth in claim 23, wherein said pixel electrode is formed, after said insulating film has been formed, on said insulating film above a region sandwiched between said first and second signal lines.

26. A method of fabricating a liquid crystal display device including a plurality of pixel electrodes each spaced away from adjacent ones by a predetermined distance, first signal lines each extending along one side of each of said pixel electrodes, each of said first signal lines having a bending portion which  
10 extends along a periphery of each of said pixel electrodes, and second signal lines each extending along the other side of each of said pixel electrodes, each of said second signal lines having a bending portion which extends along a periphery of each of said pixel electrodes, comprising the steps of:

(a) forming a scanning line on a transparent substrate, and then, forming a  
20 gate insulating film on said scanning line and said transparent substrate;

(b) forming a channel on said gate insulating film above said scanning line;

(c) forming said first and second signal lines so that at least one of each of said first signal lines and each of second signal lines has a projecting portion extending towards each of said pixel electrodes and that a first length along which  
25 each of said pixel electrodes and each of said first signal lines are adjacent to each other is equal to a second length along which each of said pixel electrodes and each of said second signal lines are adjacent to each other, and a first space between each of said pixel electrodes and each of said first signal lines is equal to a second space between each of said pixel electrodes and each of said second signal

lines,

(d) forming said pixel electrodes; and

(e) covering a product resulting from said step (d) with an insulating film.

5           27. The method as set forth in claim 26, wherein each of said pixel electrodes is formed between each of said first signal lines and each of said second signal lines in a common layer in said step (d).

10           28. The method as set forth in claim 26, wherein each of said pixel electrodes is formed, after said insulating film has been formed, on said insulating film above a region sandwiched between said first and second signal lines.

## ABSTRACT OF THE DISCLOSURE

There is provided a liquid crystal display device including (a) a pixel electrode, (b) a first signal line extending along one side of the pixel electrode, and  
5 (c) a second signal line extending along the other side of the pixel electrode. A first length along which the pixel electrode and the first signal line are adjacent to each other is equal to a second length along which the pixel electrode and the second signal line are adjacent to each other, a first space between the pixel electrode and the first signal line is equal to a second space between the pixel  
10 electrode and the second signal line. The liquid crystal display device makes it possible to minimize imbalance in parasitic capacitances to be generated between the pixel electrode and the first and second signal lines.

FIG. 1  
PRIOR ART

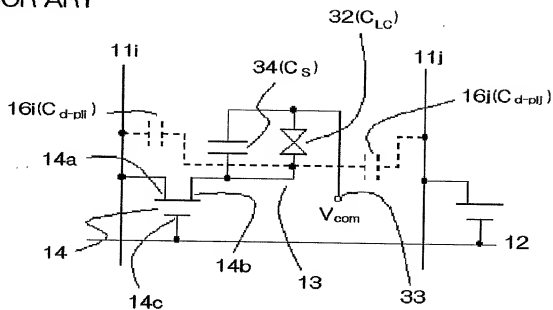


FIG. 2  
PRIOR ART

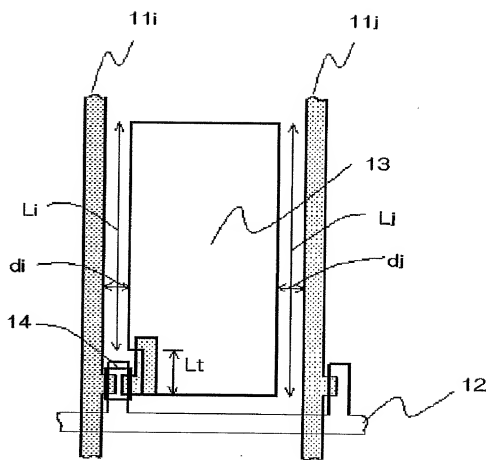

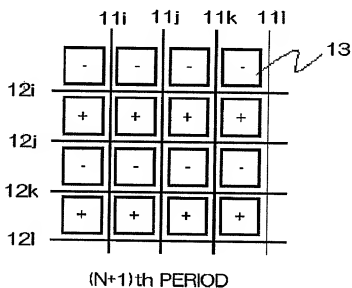


FIG. 3A  
PRIOR ART

FIG. 3B  
PRIOR ART

13

FIG. 4A  
PRIOR ART

	11i	11j	11k	11l
12i	+	-	+	-
12j	+	-	+	-
12k	+	-	+	-
12l	+	-	+	-

Nth PERIOD

FIG. 4B  
PRIOR ART

	11i	11j	11k	11l
12i	-	+	-	+
12j	-	+	-	+
12k	-	+	-	+
12l	-	+	-	+

(N+1)th PERIOD

13



FIG. 5A  
PRIOR ART

	11i	11j	11k	11l
12i	+	-	+	-
12j	-	+	-	+
12k	+	-	+	-
12l	-	+	-	+

Nth PERIOD

FIG. 5B  
PRIOR ART

	11i	11j	11k	11l
12i	-	+	-	+
12j	+	-	+	-
12k	-	+	-	+
12l	+	-	+	-

(N+1)th PERIOD

13

FIG. 6

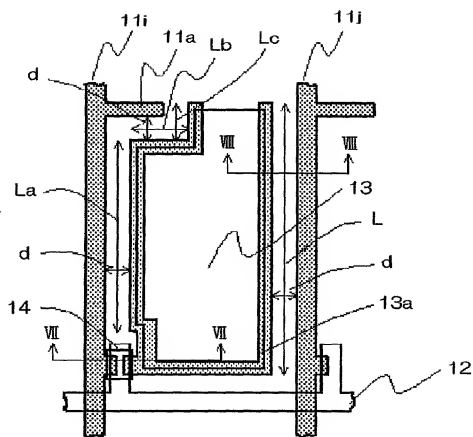


FIG. 7

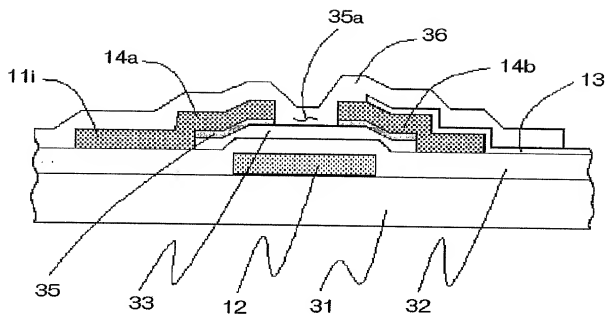


FIG. 8

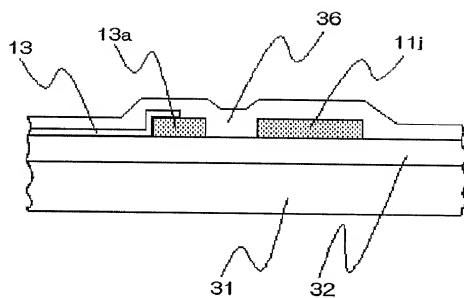


FIG. 9

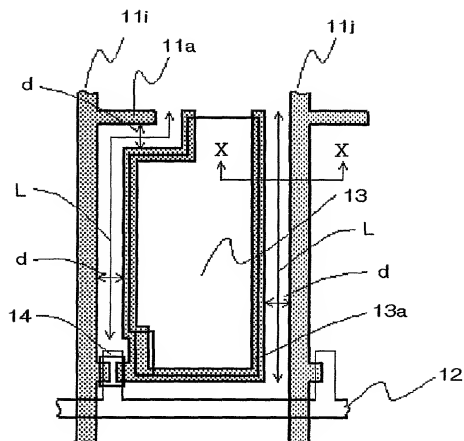


FIG. 10

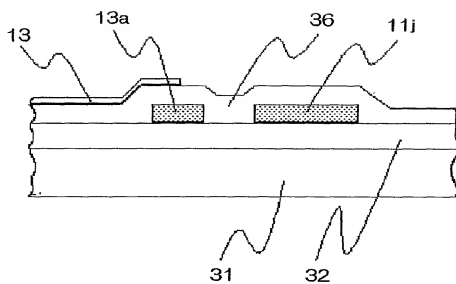


FIG. 11

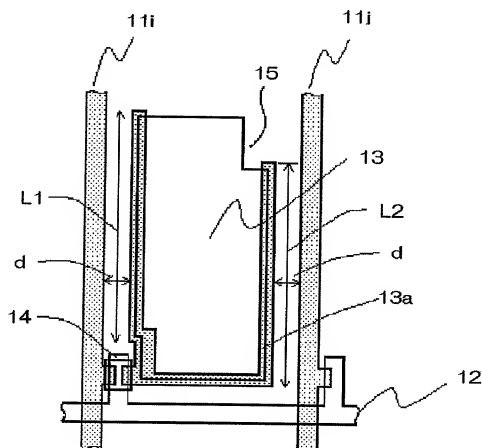


FIG. 12

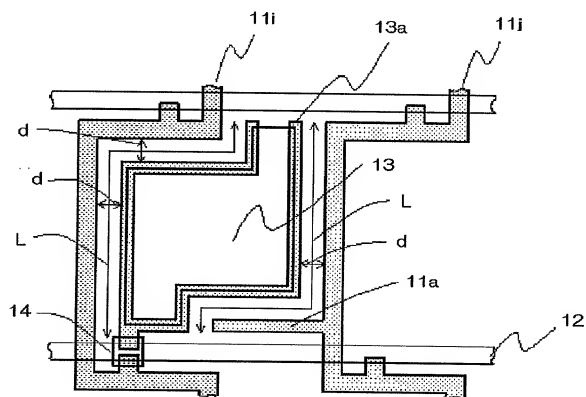




FIG. 13


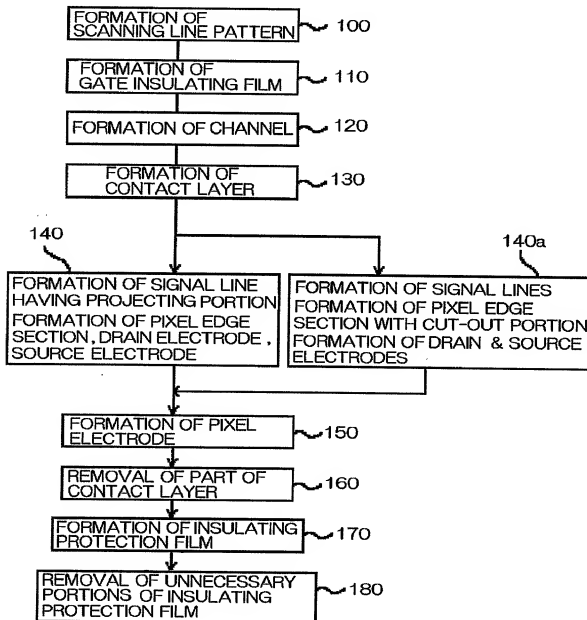


FIG. 14

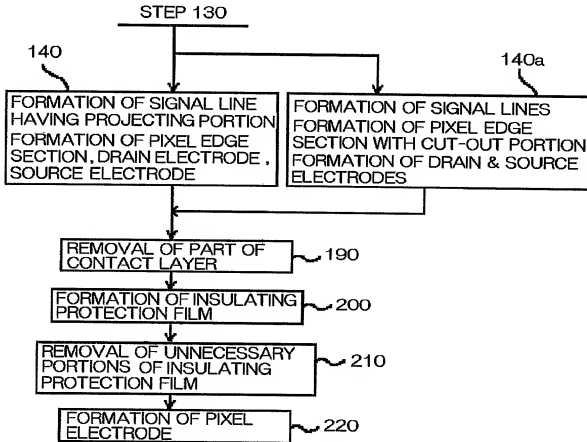

Docket No.  
12983

## Declaration and Power of Attorney For Patent Application

### English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

LIQUID CRYSTAL DISPLAY DEVICE AND METHOD OF FABRICATING THE SAME

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

10-271140  
(Number)

Japan  
(Country)

25/9/1998  
(Day/Month/Year Filed)

☐

\_\_\_\_\_  
(Number)

\_\_\_\_\_  
(Country)

\_\_\_\_\_  
(Day/Month/Year Filed)

☐

\_\_\_\_\_  
(Number)

\_\_\_\_\_  
(Country)

\_\_\_\_\_  
(Day/Month/Year Filed)

☐

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)  
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Stephen D. Murphy, Reg. No.: 22,002

Paul J. Esatto, Reg. No.: 30,749

William C. Roch, Reg. No.: 24,972

Mark J. Cohen, Reg. No.: 32,211

Frank S. DiGiglio, Reg. No.: 31,346

Donald T. Black, Reg. No.: 27,999

Send Correspondence to: Paul J. Esatto, Jr.  
Scully, Scott, Murphy & Presser  
400 Garden City Plaza  
Garden City, New York 11530

Direct Telephone Calls to: (name and telephone number)  
Paul J. Esatto, Jr. (516) 742-4343

Full name of sole or first inventor	
MUNEHIRO IKEDA	
Sole or first inventor's signature	Date
<i>Munehiro Ikeda</i>	August 30, 1999
Residence	Tokyo, Japan
Citizenship	Japan
Post Office Address	c/o NBC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	